

CDV-70K



7 INCH WIDE LCD

A gleaming touch button creates an emotional space.



VIVID DISPLAY AND

It leads the world color video phone markets providing undistorted clear view and outstanding quality.



LED BACKLIGHT

Provide vivid pictures by utilizing LED backlight.


FUNCTION

- 3.5 inch TFT LCD screen
- Memory storing in SD memory (CDV-70KM)
- Video talk and door lock release enable (both individual and public entrance)
- Expandable up to 2 monitors with 2 CCTV cameras and 2 door cameras

SPECIFICATION

Power source	AC 100-240V, 50/60Hz	LCD size	7 inch wide color LCD
Mount type	Surface-mounted type	Operating temp.	0°C~40°C
Wiring	Door camera: 4 wires(Polarity) Interphone: 4 wires(Polarity)	Distance	Door camera: 50m(0.65Ø) Interphone: 20m(0.65Ø)
Consumption	Max.16W/standby 3.9W	Dimension(mm)	311(W)×168(H)×32(D)

WIRING DIAGRAM

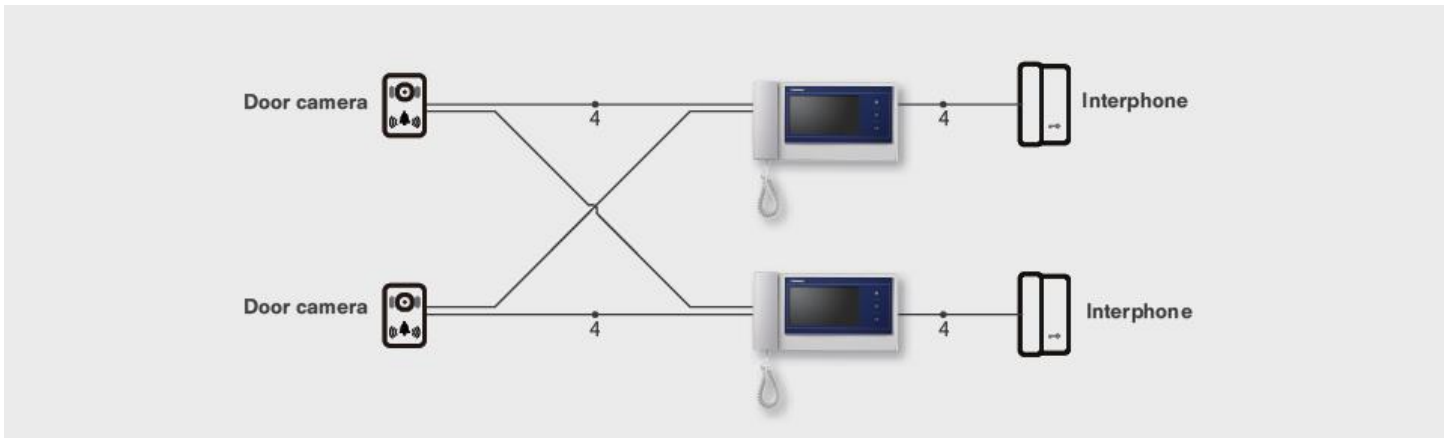

ACCESSORY

ACCESSORY	CONTENTS	QUANTITY(EA)
Connector	CONN. 4P×300mm	2
Monitor fixing screw	PHM 3×6 ZnY	1
Wall bracket mounting	GH1T 4×18 ZnW	4
Bracket		1

DRC-40K



FUNCTION

- Illuminance sensor
- Wall-mounted type
- Built-in white LED
- Out door model
- House call and talk

SPECIFICATION

Power source	12V(From monitor)	Operating temp.	-10°C~50°C
Wiring	4 wires	Camera view angle	Horizontal 75°/ Vertical 55°
Distance	50m (Ø0.65)	Dimension(mm)	96(W)x155(H)x32(D)