

SCD-6013

1080p Analog HD Dome Camera




Key Features

- Full HD (1,920 x 1,080 30fps) Resolution
- 0.1Lux@F1.2 (Color), 0.01Lux@F1.2 (B/W)
- Built-in 2.8mm fixed Lens
- Day & Night (ICR), DWDR, SSNRIV, Motion Detection
- Transmission Distance Max. 500m
- EasyInstallation (Plug & Play)

Dimensions

Unit : mm (inch)

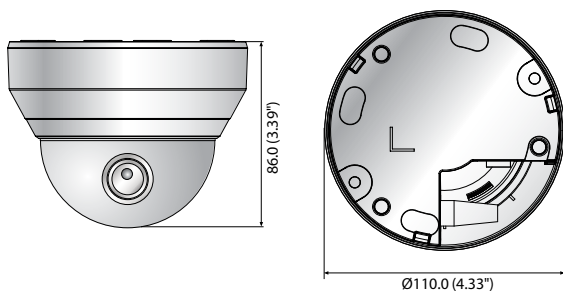

Accessories (Optional)



SBP-300HM7 SBP-300LM SBP-300CM SBP-300WM1 SBP-300WM SBP-300B SBP-300PM SBP-300KM

SCD-6013

| VIDEO | |
|----------------------------------|---|
| Imaging Device | 1/3" 2M CMOS |
| Total Pixels | 1,956(H) x 1,266(V) 2.47M pixels |
| Effective Pixels | 1,944(H) x 1,092(V) 2.12M pixels |
| Scanning System | Progressive scan |
| Min. Illumination | Color : 0.1Lux (F1.2) B/W : 0.01Lux (F1.2) |
| S / N Ratio | 52dB (AGC off, Weight on) |
| Video Output | BNC (AHD, CVBS selectable) |
| Resolution | 1920 x 1080 |
| Max. Framerate | 30fps@1080p, 30fps@720p |
| LENS | |
| Focal Length (Zoom Ratio) | 2.8mm fixed |
| Max. Aperture Ratio | F1.8 |
| Angular Field of View | H : 108.7° / V : 60.6° / D : 125.4° |
| Min. Object Distance | 0.2m (0.66ft) |
| Focus Control | Manual |
| Lens Type | Fixed |
| Mount Type | Board-in type |
| PAN / TILT / ROTATE | |
| Pan / Tilt / Rotate Range | 0° ~ 350° / 0° ~ 67° / 0° ~ 355° |
| OPERATIONAL | |
| On Screen Display | Multi-language Support (16) English, Japanese, Spanish, French, Portuguese, Korean, German, Italian, Russian, Polish, Czech, Romanian, Serbian, Swedish, Danish, Turkish |
| Camera Title | Off / On (Displayed 15 characters) |
| Day & Night | Auto (ICR) / Color / B/W |
| Backlight Compensation | Off / User BLC / HLC |
| Wide Dynamic Range | DWDR |
| Digital Noise Reduction | SSNRIV (Off / On) |
| Defog | Off / Auto / Manual |
| Motion Detection | Off / On (4 zones) |
| Privacy Masking | Off / On (4 zones rectangle) |
| Gain Control | Off / Low / Middle / High / Very High |
| White Balance | ATW / Outdoor / Indoor / Manual / AWC (1,800K° ~ 10,500K°) |
| Electronic Shutter Speed | 1sec ~ 1/12,000sec |
| Reverse | Off / H-Rev / V-Rev / HV-Rev |
| Profile | Basic, Day & Night, Backlight, Indoor, User |
| Remote Control Interface | Coaxial control |
| Protocol | AHD : ACP (AHD Coax Protocol) CVBS : Pelco-C (Coaxitron) |
| Video Transmission Distance | 500m (1,640.42ft) (5C2V coaxial cable) |
| ENVIRONMENTAL | |
| Operating Temperature / Humidity | -10°C ~ +55°C (+14°F ~ +131°F) / Less than 90% RH |
| ELECTRICAL | |
| Input Voltage / Current | 12V DC ±10% |
| Power Consumption | Max. 2.5W |
| MECHANICAL | |
| Color / Material | Ivory / Plastic |
| Dimensions (WxH) | Ø110.0 x 86.0mm (Ø4.33" x 3.39") |
| Weight | 231g (0.51 lb) |

* The latest product information / specification can be found at hanwhasecurity.com
 * Design and specifications are subject to change without notice.
 * Wisenet is the proprietary brand of Hanwha Techwin, formerly known as Samsung Techwin.