


AUTOMATIONS FOR GARAGE & INDUSTRIAL DOORS

VN.S40V

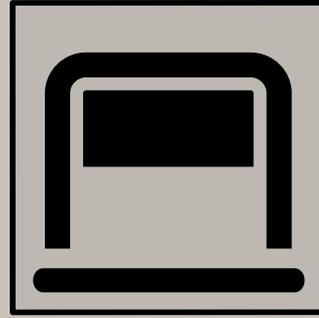

INDUSTRIAL USE

- Version for sliding industrial doors and folding doors with more than 2 wings
- Reduction unit submerged in oil, warm shaft made of tempered steel and bronze gear
- Design and reduced dimensions allow the installation of the product in the most critical places
- Strength and silence are the main characteristics



THINK



Functional good looks and dimensions that allow installation in the most difficult places



The reduction unit is composed of parts in oil bath to ensure a long life of the product

NOTES:

.....

.....

.....

.....

.....





INDUSTRIAL DOORS

sliding



INDUSTRIAL DOORS

folding

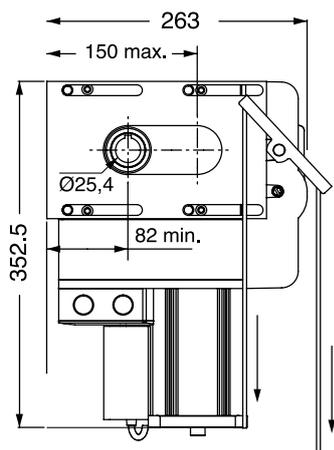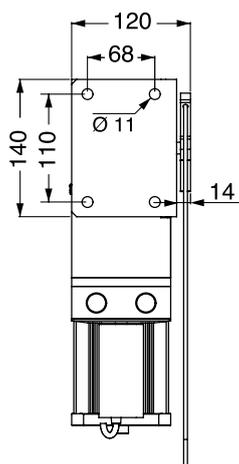

TECHNICAL DATA

VN.S40V

Motor supply	230 Vac
Max. absorbed current	1,5 A
Torque	135 Nm
Output speed	48 r.p.m.
Shaft Hole	1" (25,4 mm)
Limit switch red. radio	1/40
Operation cycle	40 %
Protection level	IP 40
Operating temp.	-20°C/+50°C
Max door surface	800 Kg
Lubrication	Oil
Weight	15 Kg
Items no. per pallet	48